





Features

- ❑ Straight, center-mounted guide handle offers superior maneuverability and can be lowered within inches of the surface to operate plate under obstacles and form work
- ❑ Lifting points are available and front lift cage offer easier loading and unloading for operator convenience
- ❑ Compact design, easy to use, cast bottom plate
- ❑ Smooth and flexible

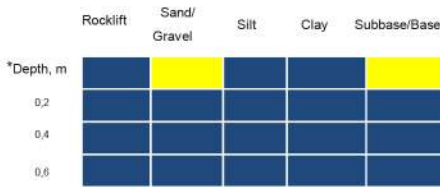

* Recommended thickness of layer

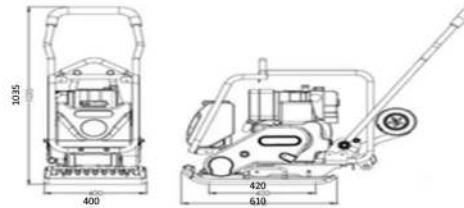

Model	FPC90
Plate size LxWxH	400 x 610
Operating weight (kg)	85
Centrifugal force (kN)	14
Operating speed (m/min)	21
Compacted area (m ² /h)	400-500
Max gradeability	20
Frequency (Hz)	92
Engine	Product Code
Honda GX-160 3.6kW (4.8HP)	201.90.00000
Robin EY-20 (3.6KW)	201.90.10000
Kawata KWM (5.5HP)	201.60.20000
Kawata KWG (5.5HP)	201.90.30000
Yanmar L48N Diesel (6HP)	201.90.000LD